


**Warning: Perform a bearing break-in procedure for new spindle.  
Visit [UgraCNC.com](http://UgraCNC.com) FAQ for details.**



Voltage	V±10%	220		
Output Power	kW	0.4		
Current	A	2.64		
Frequency	Hz	400		
rpm	rpm	24000		
Torque	Nm	0.16		
Front Bearing				
Vost. Bearing				
Efficiency	η			
Power factor	cosφ	0.68		
Poles		2		
Service type		S1		
Insulation classoltage		F		
Cooling		Aria forzata		
Weight	kg	1.5		
Type of Protection	IP	54		

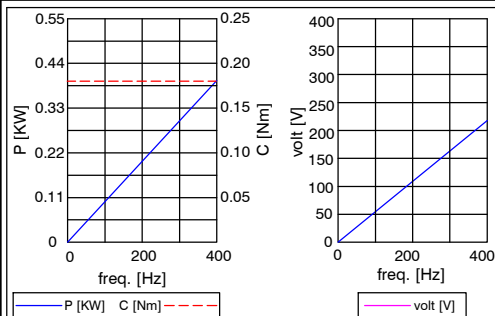

ELECTRIC CONNECTIONS	
Nr.Pin	Description
1	⊕ Earth connection
2	U Fase/Motor phase
3	V Fase/Motor phase
4	W Fase/Motor phase
5	PTC
6	PTC
7	/



<b>SFM2430B-24/0.40TMP ER11</b>			
Mark	Change Description	Date:	Name
Design: M.Z.HUANG	Date: 2013.03.01	Scale:	
Check: Y.H.HUANG	Date: 2013.03.01	Size: A4	
Approv:	Date:	Page:	
<b>SFM2430B-ER11-DX-220V-24/400HZ-0.40KW/S1</b>			

Drawing Ver : A4  
Dimensions in mm

**SY042070-2P0211**