



Warning: Perform a bearing break-in procedure for new spindle.
Visit UgraCNC.com FAQ for details.

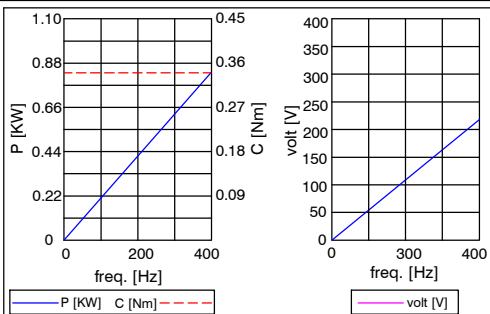

Voltage	V±10%	220
Output Power	kW	0.80
Current	A	3.55
Frequency	Hz	400
rpm	rpm	24000
Torque	Nm	0.32
Front Bearing		
Vost. Bearing		
Efficiency	η	
Power factor	$\cos\phi$	0.70
Poies		2
Service type		S1
Insulation classlottage		F
Cooling		Aria forzata
Weight	kg	
Type of Protection	IP	54

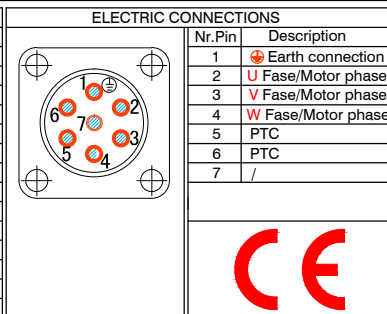

SFM2835B-24/0.80TMP-ER16

MTS® 深谊

Mark	Change Description	Date:	Name
Design: M.Z.HUANG	Date: 2013.03.01	Scale:	
Check: Y.H.HUANG	Date: 2013.03.01	Size: A4	
Approv:	Date:	Page:	

Drawing Ver : A4
Dimensions in mm

SY050085-2P0309

SFM2835B-ER16-DX-220V-24/400HZ-0.80KW/S1