



Warning: Perform a bearing break-in procedure for new spindle.
Visit UgraCNC.com FAQ for details.

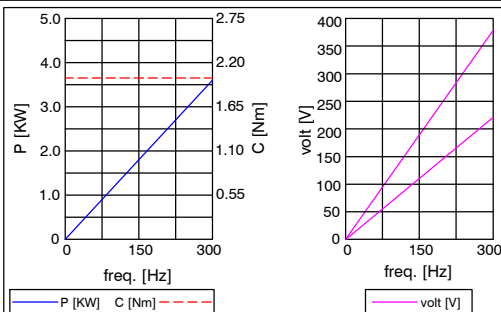

Voltage	V±10%	380	
Output Power	kW	3.7	
Current	A	8.7	
Frequency	Hz	300	
rpm	rpm	18000	
Torque	Nm	1.96	
Front Bearing			
Vost. Bearing			
Efficiency	η		
Power factor	cos φ	0.79	
Poies		2	
Service type		S1	
Insulation classoltage		F	
Cooling		Aria forzata	
Weight	kg		
Type of Protection	IP	54	

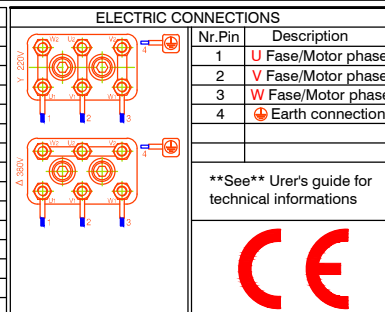

SFM4653D-18/3.70TMP ER25

MT 深谊

Mark Change Description Date: Name

Design: M.Z.HUANG Date: 2013.03.01 Scale:

Check: Y.H.HUANG Date: 2013.03.01 Size: A4

Approv: Date: Page:

Drawing Ver : A4
Dimensions in mm

SY080140-2P0604

SFM4653D-ER25-380/220V-DX-18/300HZ-3.70KW/S1